


BLASTCLAD

SCAFFOLD SHEETS

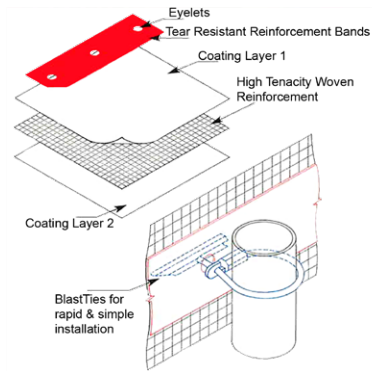

APPLICATIONS

BlastClad scaffold sheeting is a temporary, general purpose, containment and/or weather protection sheeting system. Designed for all frame and tubular scaffold systems, BlastClad can be installed horizontally or vertically. With a reinforced composite construction that combines superior tensile strength characteristics with puncture and tear resistance.

Only BlastTies or toggle ties supplied by BlastOne are recommended for fixing BlastClad Sheeting to scaffolds. Cable/ratchet ties or any other rigid fastenings are not recommended as these may cut through the fastening points.

CERTIFICATIONS AND RATINGS

- BS 7955 Scaffold Sheeting
- BS 8093 Installation
- ISO 9001 quality standards
- Conforms to British, European and US standards.

KEY FEATURES OF BLASTCLAD SCAFFOLD SHEETS

Improved weather resistance:

- The effects of high winds are greatly reduced due to the closely woven mesh construction.
- Ideal product for exposed site locations.
- Protection of work surfaces and working environment against the elements, including rain, sleet & snow, dust and sandstorms.
- Improved working environment
- Improves airflow and ventilation in hot and humid conditions.
- Provides a means of controlling temperature and humidity of work areas.
- Enhanced site safety by reducing the risk of debris and other small objects falling outside the scaffold.

- Unaffected by mild acids or alkalis and does not support bacterial, fungal or organic growth.
- Improved productivity
- For industrial painting, solvents are readily dispersed.
- Improved drying times.
- For abrasive blasting, can be used in conjunction with dust control technology.

SPECIFICATIONS	
Material	Reinforced Low Density Polyethylene (LDPE) & UV Stabilisation
Weight	250gsm
Thickness	190 microns without scrim 600 microns with scrim
Tensile Strength	Warp 750 N/50mm Weft 750 N/50mm
Puncture Resistance	1300 newtons
Eyelets	Every 10cm along reinforcement bands. Note: 3m and 4m eyeletted on hems only
Eyelets Strength	1000 newtons
Roll Sizes	2.0m x 45m 3.0m x 45m 4.0m x 45m

ACCESSORIES



BLASTTIES



POWERCLAMP JOINER